

Working cycle



Health



Savings



Efficiency




Environment



Safety

newtarget

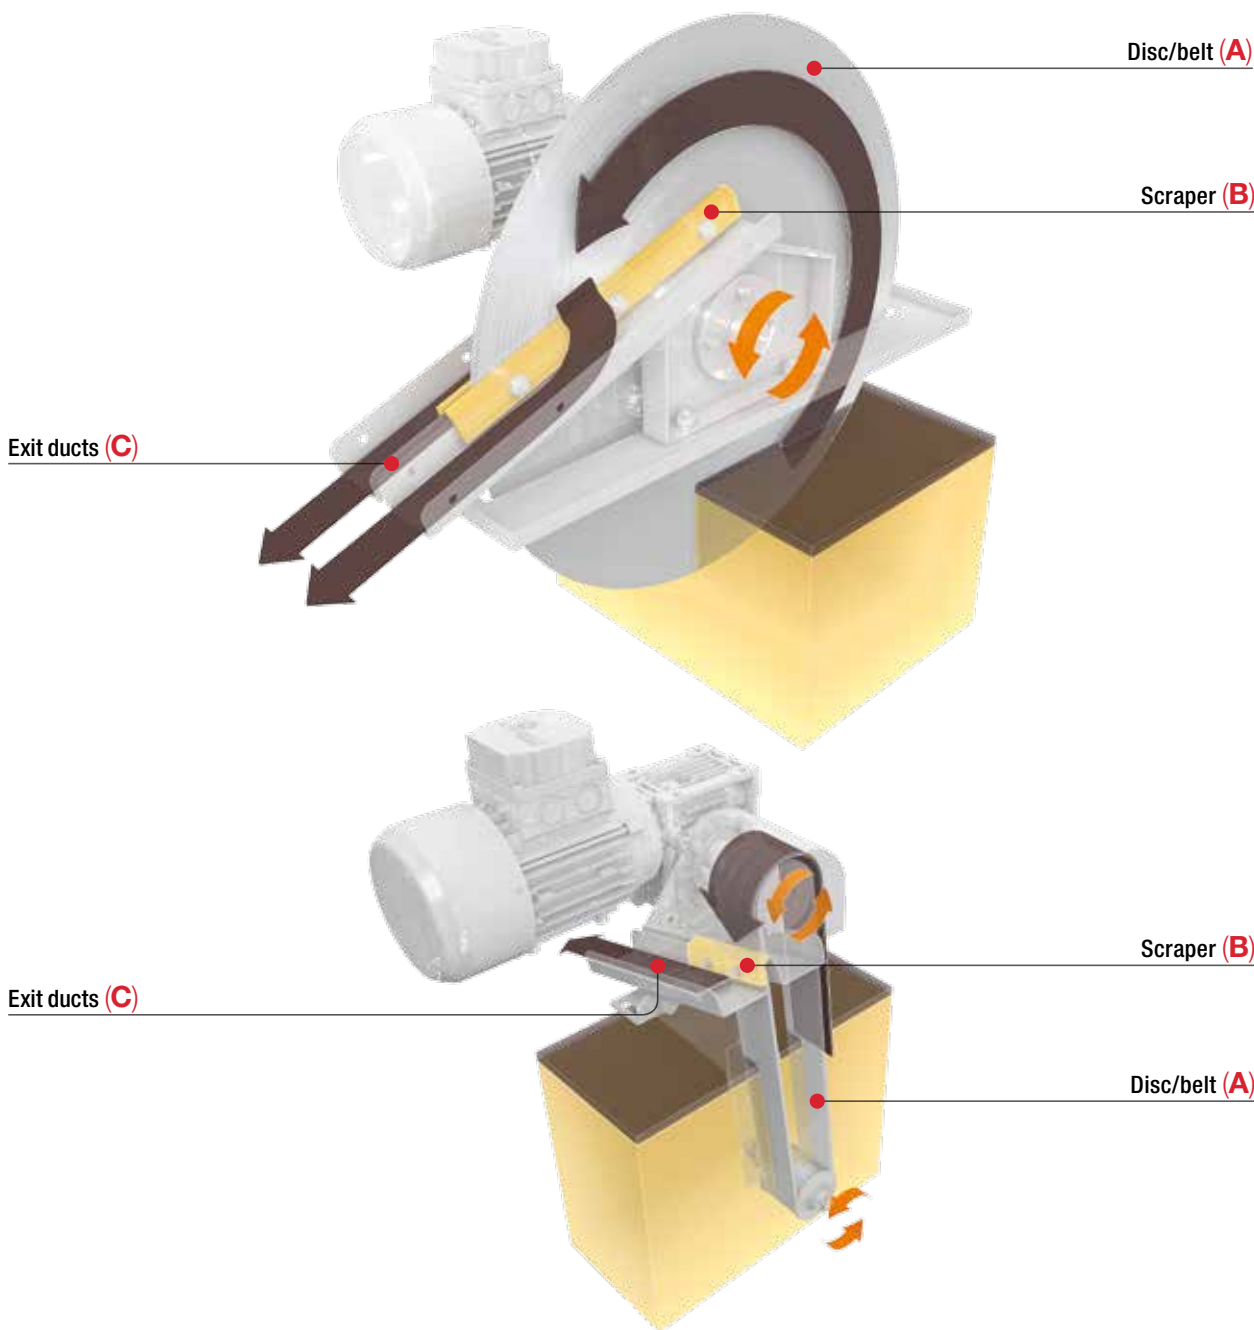

- 1 The disc/belt (A) is immersed into the liquid. Thanks to rotation the polluting agents stick to its surface and are dragged out.
- 2 During rotation the disc/belt meets two scrapers (B) fitted with a rubber rim which remove the film of polluting agents stuck to

it and transport it outside by means of exit ducts (C).

- 3 Skim can be equipped with an electrical control board with the possibility of setting up a temporized working cycle.

Liquid filters **LOSMA**



Losma SpA - Via E. Fermi, 16
24035 Curno (BG) - Italia
Cap.Soc. I.V. Euro 500.000,00
Reg. imp. e P.IVA e C.F. 01234590162
R.E.A. 185685



Losma Engineering - Torino
www.losma.it

Germany - Losma GmbH
www.losma.de

USA - Losma Inc
www.losma.com

UK - Losma UK Limited
www.losma.co.uk


India - Losma India Pvt Ltd
www.losma.co.in

F005.129.02



Skim

Eliminator of superficial oils

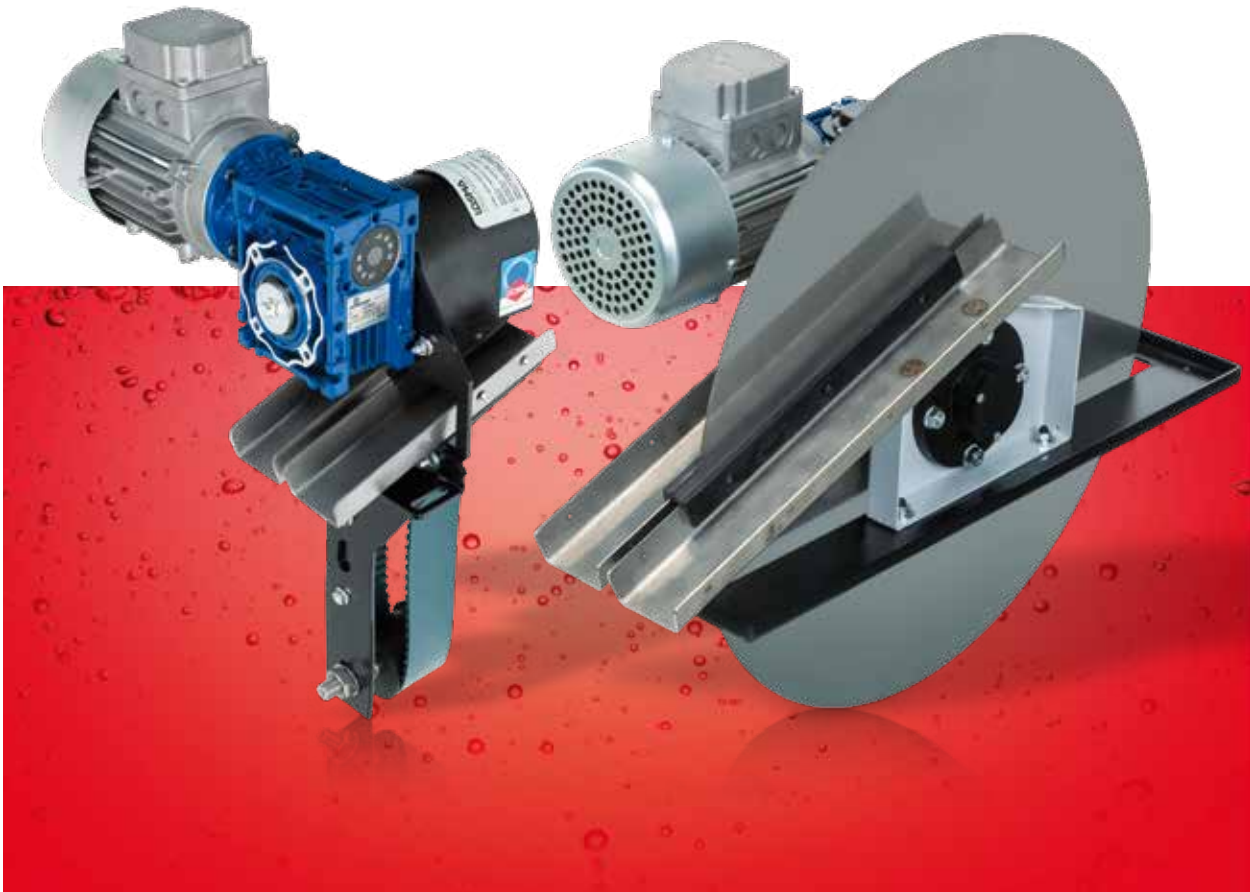

ENG

Skim

Skim is an eliminator of superficial oil, suitable to be used on every kind of basin or tank, thanks to its shape and building materials.

Skim is available in two versions: disc (Skim D) or belt (Skim N).

This last version is suitable in situations of reduced space and when the tank is not at full capacity.

Skim removes from the coolant surface the veil of light products, which do not mix with water and create a barrier and prevents air from entering into contact with the emulsion allowing the formation of anaerobic flora bacteria.


Thus the use of Skim preserves the quality of coolants and eliminates unpleasant odors.

ALL FILTERS ARE



TESTED

BEFORE DELIVERY

LOSMA guarantees that every single unit is individually tested through strict control procedures. Each unit is issued a test certificate for quality and function.

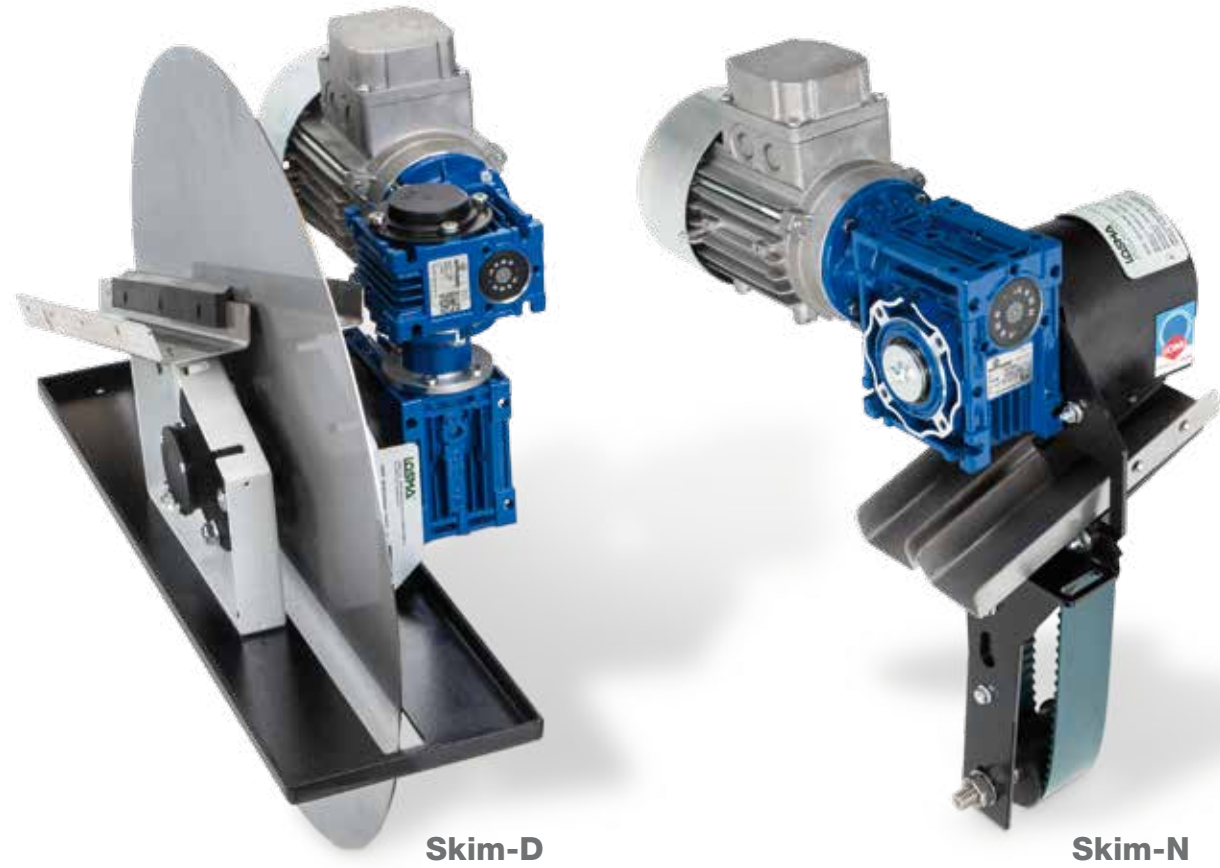

Technical data

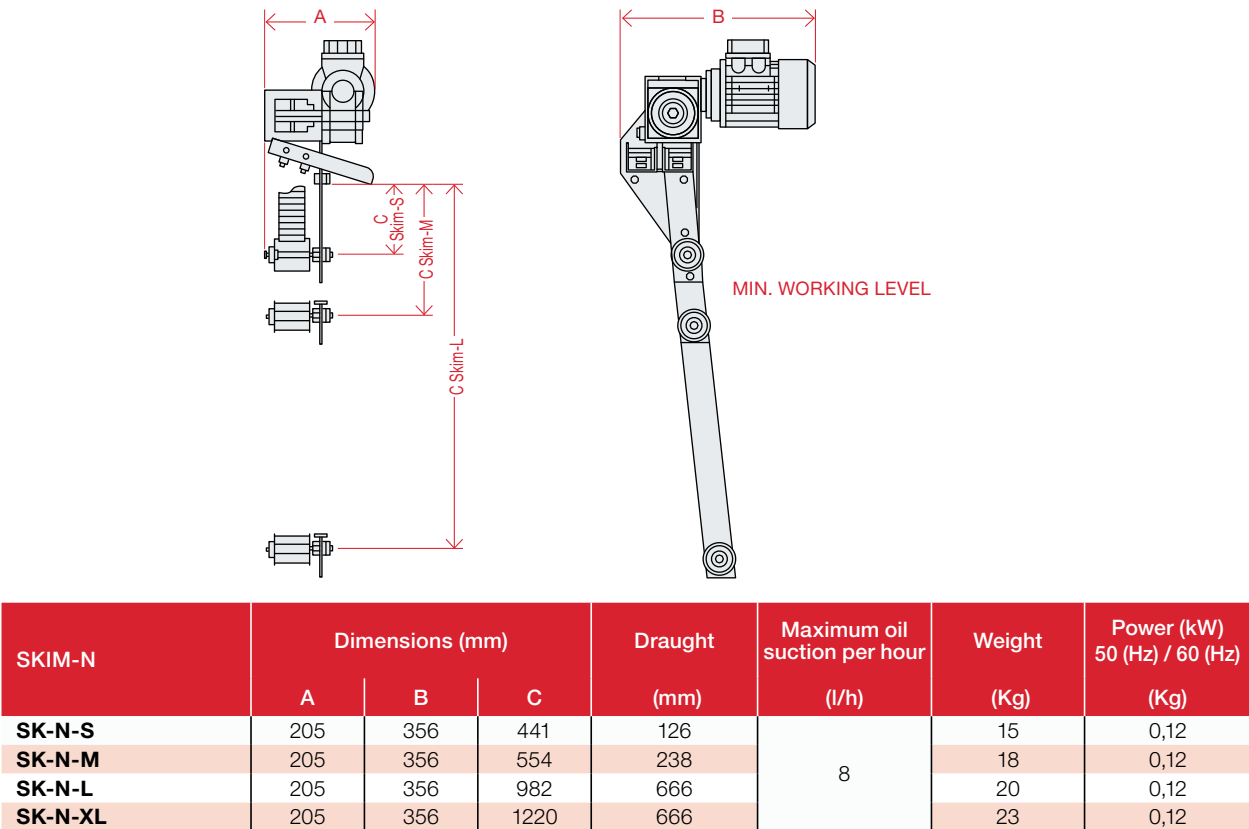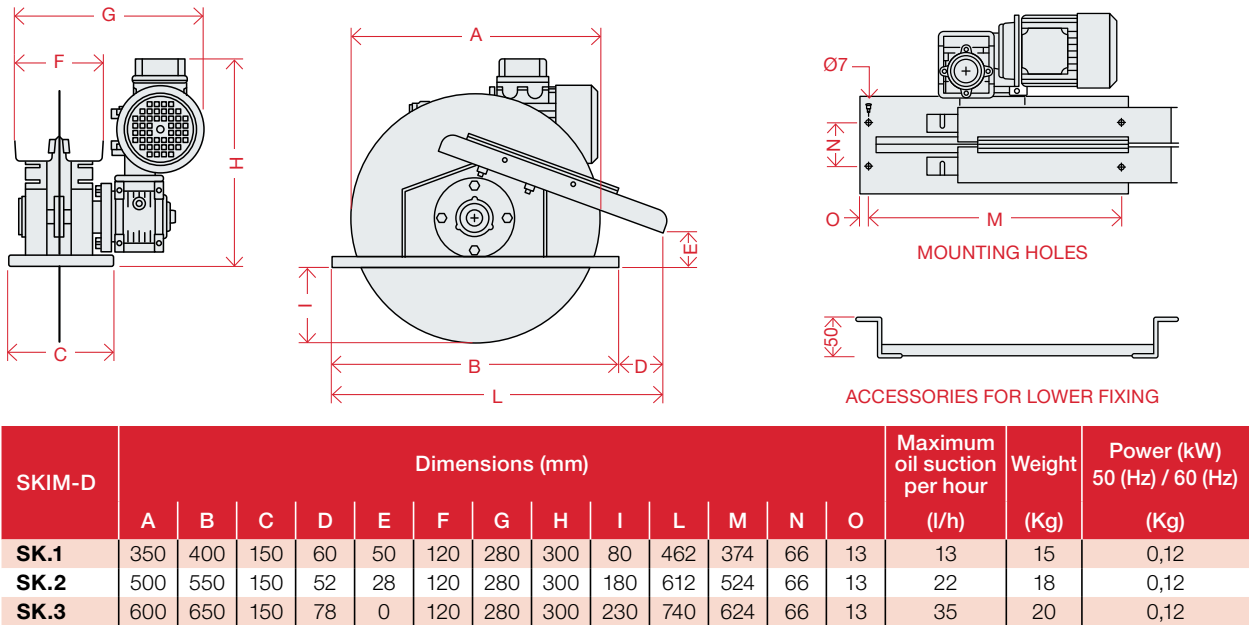

Plus



VERSATILITY AND EASY MAINTENANCE

Thanks to the wide range of accessories Skim can be mounted either on the tank edge, on the cover, encased or on an internal structure. The extreme simple construction limits the

maintenance to a few simple actions. The wearing control of scrapers and the periodical cleaning of waste discharging off-lets keeps the system in perfect working conditions.